


escape™

CHN

M1 Air

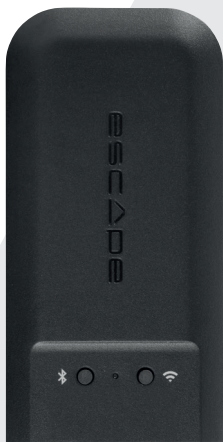

快速入门指南

仔细阅读附件中的所有安全注意事项
或网站www.escapespeakers.com上的信息。

包含配件

连接高保真音响系统的配件



电源+3个适配器



USB 电源线（1.5米）



3.5 毫米立体声微型插孔转RCA电缆（1米）



Toslink 适配器



光缆

ACCESSORIES FOR CONNECTING TO THE AUX 2 INPUT ON A P9



魔术贴x2




短 3.5 毫米 -3.5 毫米辅助线（长 15 厘米）



A型USB转 USBmicro 短斜角电缆（长 4.5 厘米）

直流 5V_1A 输入

光纤/ 辅助输出

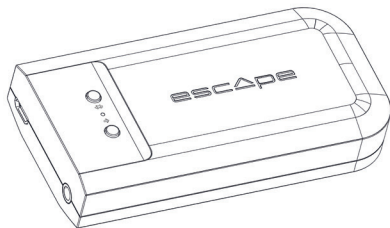

感谢您的购买！

感谢您购买 ESCAPE M1 Air，这是一款高保真音频流模块，采样率为 192KHz/24bit，支持 Chromecast Audio、AirPlay2、Spotify Connect 和 Roon。



正确操作 M1 Air 的重要信息

M1 Air 需要与 WiFi 路由器建立无线连接。请确保您要使用 M1 Air 的地方有足够强的 WiFi 信号。

Escape Remote应用程序

强烈建议使用 M1 Air 专用的 Escape Remote 应用程序。可从苹果应用商店（iOS）和谷歌应用商店（Android）免费下载。



Airable radio **airable**

使用 Escape Remote 应用程序，您可以选择可播放的节目目录，其中包括全球 30,000 多个广播电台和 25,000 个播客。这个庞大的目录可按地区、类型、受欢迎程度和质量进行分类。网络广播电台由 **airable GmbH** 管理，其团队确保不断添加新内容，为免费获取音乐、新闻和娱乐提供无限来源。这项服务不属于 Escape bv。

将 M1 Air 与现有的 HiFi 设备或有源扬声器连接。

1 步骤 1


- 将带有可互换插头（欧盟/英国/美国）的 5.0 伏/1 安培交流电源适配器连接到主电源上，然后使用随附的 1.5 米长 USB A 型至 micro USB 电缆通过 micro USB 输入为 M1 Air 供电。

2 步骤 2

- 将 1 米长的 3.5 毫米立体声微型插孔转 RCA 电缆通过 M1 Air 音频输出端连接到高保真设备或有源音箱的线性输入端。红色 RCA 插头为右声道输出。
- 如果您的 HiFi 设备带有光纤输入，则可以使用随附的迷你 Toslink 适配器，将其连接到 M1 Air 模块的 3.5 毫米输出端，并使用 1 米长的光纤电缆连接 M1 Air 和 HiFi 设备。

注意：避免将 M1 Air 接收器完全置于高保真设备后面，因为这样可能会屏蔽 WiFi 信号，影响正常操作。

将 M1Air 与 Escape™ P9 的 AUX 2 输入连接

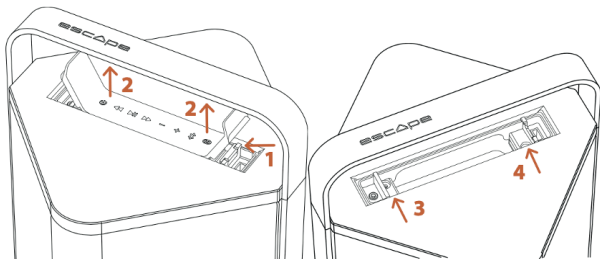

步骤 1/2

取出键盘

第 3/4 步

锁定（放回）键盘

1 步骤 1

- 打开键盘右侧 USB 输入上的键盘盖，按下锁定装置，将键盘从键盘盒中取出（见图中的 1 和 2）。

2 步骤 2

- 完全取下键盘。不要断开键盘与电缆连接器的连接。
- 将所提供的一条尼龙搭扣带粘贴在键盘下方 P9 隔层底部的最左侧。将另一条尼龙搭扣带放在 M1 Air 底部 的中央位置。

- 将短（15 厘米）3.5 毫米 - 3.5 毫米辅助线连接到 M1 Air 辅助输出端，将短（4.5 厘米）直角 USB A 型 - USB 微型线连接到 M1 Air 电源输入端。
- 使用尼龙搭扣条将 M1 Air 固定在底部最右侧，Escape™ 徽标的阅读方向与手柄上的阅读方向一致。现在将 3.5 毫米电缆连接到 P9 的 AUX 2 输入端。它位于机箱侧壁左侧（不要与上面的 AUX 1 输入口混淆）。然后将短 USB 电缆连接到 P9 的 USB 电源输出端。它位于隔层侧壁的右侧（不要与顶部的 USB 音频输入相混淆）。

3

步骤 3

- 要重新安装键盘，应将其滑入 AUX 1 输入旁边的锁定钩，然后轻轻按入卡锁装置（图中的 3 和 4）。现在应等待 M1 Air 配置完成。

4

步骤 4

- 使用开/关按钮打开 P9。
- 重要：确保设备上安装了最新版本的 P9 固件（最低 3.1.8）。有关详细信息，请参阅 [Escape Remote 应用程序部分的 P9 产品页面](#)。

用无线网络连接 M1 Air

通过 Google Home 应用程序设置 spotify connect、airplay 2 和 chromecast 步骤 1

1 步骤 1

- 将 Google Home 应用程序 [] 到手机或平板电脑，连接 M1 Air app 与无线网络连接。确保您的手机或平板电脑连接了相同的您希望用来设置 M1 Air 的 WiFi 网络。

2 步骤 2

- 等待 M1 Air 进入配置模式。M1 Air 上的绿色 LED 灯将快速闪烁（0.2 秒开/关）

3 步骤 3

- 打开 Google Home 应用程序 [] 并选择开始屏幕左上角的 [+] 符号，或选择 "设置 Escape M1 Air" 。按照 Google Home 应用程序中的步骤操作。

设置完成。打开喜欢的音乐应用程序，选择 AirPlay 2 符号  （仅限 iOS 设备）或 Cast 符号 [] （iOS 和 Android 设备），然后将音乐串流到 M1 Air 。或直接通过 Spotify Connect 串流。

提示：在 Google Home 应用程序中选择 M1 Air ，进入设备设置并激活 "全动态范围"


提示：通过 Google Home 应用程序将扬声器组合起来，即可通过 Cast 在家中同步播放音乐。注意：Chromecast （第一代）不支持此功能。

仅在 **airplay 2** 和 **spotify connect** 中通过 **iPhone** 或 **iPad** 进行配置

1 步骤 1

- 确保你的 **iPhone** 或 **iPad** 与你要用来设置 **M1 Air** 的 **WiFi** 网络连接。等待 **M1 Air** 进入配置模式。**M1 Air** 上的绿色 **LED** 灯将快速闪烁（0.2 秒开/关）。

2 步骤 2

- 打开 **iPhone** 或 **iPad** 上的 "设置" []。**M1 Air** 将创建一个临时网络并将出现在可用网络列表中。重要！请勿在可用网络列表中选择临时 **Escape M1 Air** 网络 (xxxxxxx)。
- 请在 "配置新的 **AirPlay** 扬声器" 信息下选择 "**Escape M1 Air** (xxxxxxx)"。按照 **AirPlay** 配置下的步骤操作。

SET UP NEW AIRPLAY SPEAKER...

Escape M1 Air137BE8 >

- 设置完成。打开喜欢的音乐应用程序，选择 **AirPlay 2** 符号 []。

注意：**M1 Air** 在同一时间只能保留一个 **WiFi** 网络。如果您修改您的 **WiFi** 网络时，必须将 **M1 Air** 重置为新网络。您可能首先需要对 **M1 Air** 进行重置。

注：如果 "配置新的 **AirPlay** 扬声器" 信息不再可见，请重置 **M1 Air**，并留出足够的时间让设备重新启动。

使用 Spotify® Connect

Spotify® 是一项数字音乐服务，可提供数百万首歌曲。Spotify® Connect 可以使用 Spotify® iOS 或 Android、Mac 或 PC 应用程序在 M1 Air 和互联网之间建立连接。您可以在不中断音乐的情况下拨打和接听电话。一旦您连接上了 M1 Air 设备后您可以关闭移动设备或电脑，音乐将继续播放。Spotify® Connect 在任何时候都只能在单个扬声器上播放。

ROON READY

Roon 采用最先进的音频传输协议，不仅支持高分辨率音频，还能在 Roon Ready 终端和 Roon 服务器之间进行双向通信。拥有 Roon Ready 意味着 Escape M1 Air 使用高端 Roon RAAT 流技术（Roon 高级音频传输）。该技术提供了令人难以置信的用户界面、简易的安装、稳定的日常可靠性和最高级别的音频性能。更多信息，请访问 www.roonlabs.com 网站。

使用 Escape Remote 应用程序：通过 Google Play 或 Apple App Store 下载 Escape™ Remote 应用程序，并按照屏幕上的步骤操作，以充分利用 M1 Air 。



重要！ M1 Air 的最大输出电压设定为 1 伏，作为与 P9 配合使用的标准电压。如果有通过 Escape 应用程序中的设置菜单将输出电压从 1 伏提高到 2 伏，将不可避免地导致 P9 损坏。

如果您已将 M1 Air 连接到高保真设备上，但感觉它没有达到最大容量，则应将 M1 Air 的前置放大器输出电压从 1 伏特通过设置菜单将输出电压调至 2 伏。在增加输出电压之前，将功率放大器的音量调至较低设置。Escape bv 不对外部设备或扬声器的任何损坏负责。

注意：M1 Air 在同一时间只能保留一个 WiFi 网络。当您修改了 WiFi 网络时，必须将 M1 Air 重置为新网络。您可能首先需要对 M1 Air 进行重置。

自动软件更新：M1 Air 的内部软件会在有新版本时自动更新，前提是设备已通电并连接了 WiFi 网络。更新期间，模式 LED 灯每隔 0.5 秒闪烁一次红绿蓝光，更新完成后设备将自动重启。确保 M1 Air 在更新过程中保持开机状态。

蓝牙连接

通过无线 蓝牙® 技术将音乐串流到 M1 Air 。短按 蓝牙® 键启动 蓝牙® 连接。状态 LED 灯将闪烁蓝光。进入 Apple® 或 Android™ 设备的 "设置"，在连接列表中选择蓝牙®，然后打开蓝牙®。

xxxx 代表设备唯一序列号中的最后 4 个字母/数字组合。您可以在包装上或设备底部的标签上找到完整的序列号。连接建立后，蓝色 LED 灯将稳定亮起。

提示：如果 WiFi 连接已经设置，则可以在 M1 Air 上重新选择：短按 WiFi 开关。（状态指示灯将从蓝色变为绿色）

电源指示灯

模式/ 状态	(红、绿、蓝)	含义
M1 Air 启动	红色闪烁0.2秒开启, 0.2秒关闭	M1 Air 处于接入点 (AP) 模式, 正在搜索可用网络。(需要 ± 45 秒)
搜索可用网络	绿色闪烁 0.5 秒开启, 0.5 秒关闭	M1 Air 处于接入点 (AP) 模式, 正在搜索可用网络。(需要 ± 20 秒)
设置模式完成	绿色闪烁 0.2 秒开启, 0.2 秒关闭	找到无线网络。用户必须通过 Google Home App (ChromeCast Audio 和 AirPlay 2 设置) 或 iOS® 设备 (仅限 AirPlay 2 设置) 将 M1 Air 与选定的无线网络连接。
已连接	绿灯常亮	使用已知访问数据成功连接网络。
网络信号源	绿灯常亮	M1 Air 处于串流模式。
待机模式	绿色 LED 指示灯变暗	M1 Air 处于待机模式, 过去 20 分钟内未播放音乐。
出厂重置	绿色 - 红色 0.5 秒绿色, 0.5 秒红色	已触发出厂重置 - M1 Air 处于启动模式。
固件正在更新	重复序列: 红 - 绿 - 蓝 0.5 秒-0.5 秒-0.5 秒	正在通过以下方式进行固件更新 通过 Escape Sync 网页对 M1 Air 进行编程 与网络和 OTA 服务器建立连接 通过 OTA 服务器下载固件。
固件更新错误	红色闪烁 0.5 秒开启, 0.5 秒关闭	文件传输问题 (下载 FW.bin 文件时) 闪存写入错误 (在闪存中写入时) 网络错误 (与 OTA 服务器连接期间) 固件下载失败
蓝牙连接模式	蓝色闪烁 0.2 秒开启, 0.2 秒关闭	Bluetooth® 未链接 (可检测)。
蓝牙® 信号源	稳定的蓝光	切换到 Bluetooth® 信号源 (如果网络未被指定, 设置模式也将启动)。


操作	通过	按入时间
(BT 按钮) 链接	按下按钮	短按, 蓝色 LED 快速闪烁(开 0.2 毫秒, 关 0.2 毫秒)
(BT 按钮) 删除链接设备	按下按钮	按住 10 秒, 直到蓝色 LED 灯闪烁 (1 秒亮, 1 秒灭)。
(WiFi 按钮) 工厂重置	按下按钮	按住 WiFi 按钮超过 10 秒钟
从 WiFi 切换到 BT	按下按钮	短按 Bluetooth® 按钮, 蓝色 LED 灯闪烁, 搜索存储的 BT 设备
从 BT 切换到 WiFi	通过 iOS® 切换或 Android™ 设备	无法通过按钮从 BT 切换到 WiFi。只能通过同一 WiFi 网络上的设备和支持 AirPlay2 和/或 Chromecast 的音乐应用程序进行切换。

型号核准的代码在产品外观可见

escape™

ENG

M1 Air

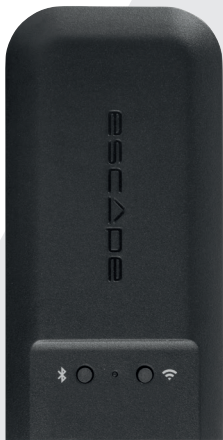

Quick Start Guide

Carefully read all safety precautions in the attached document or on the website www.escapespeakers.com before using this product.

Content

ACCESSORIES FOR CONNECTING TO A HIFI SYSTEM



Power supply + 3 adapters



USB power cable (1.5 meters)



3.5mm stereo mini-jack to RCA cable (1 meter)



Toslink adapter



Optical cable

ACCESSORIES FOR CONNECTING TO THE AUX 2 INPUT ON A P9



Velcro x 2




Short 3.5mm - 3.5mm aux cable (length 15 cm)



Short angled USB type A to USB micro cable (length 4.5 cm)

DC 5V_1A INPUT

Optical / AUX OUT

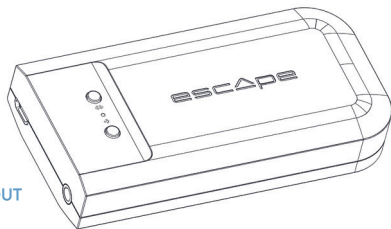

Thank you for your purchase!

Thank you for purchasing the ESCAPE M1 Air, a Hi-Res audio streaming module with a sample rate of 192KHz/24 bit, supporting Chromecast Audio, AirPlay2, Spotify Connect and Roon.



Important information for correct operation of the M1 Air

The M1 Air creates a wireless connection with your WiFi router. Ensure that you have a sufficiently strong WiFi signal in locations where you wish to use the M1 Air.

Escape Remote app

Use of the dedicated Escape Remote application for the M1 Air is strongly recommended. It can be downloaded free from the Apple App Store (iOS) and the Google Play Store (Android).



Airable radio **airable**

Using the Escape Remote app you can select the airable catalogue, with more than 30,000 radio stations around the world and 25,000 podcasts. This enormous catalogue can be sorted by region, genre, popularity and quality. The internet radio stations are managed by airable GmbH, with a team ensuring that new content is constantly added, creating an unlimited source of freely accessible music, news and entertainment. This service falls outside the responsibility of Escape bv.

Connecting the M1 Air to an existing HiFi installation or active speakers.

1

STEP 1

- Connect the 5.0 Volt/1A AC power adaptor with interchangeable plugs (EU/UK/US) to the mains supply and use the supplied 1.5 meter USB type A to micro USB cable to provide power to the M1 Air via the micro USB input.


2

STEP 2

- Connect the 1 meter 3.5 mm stereo mini-jack to RCA cable via de M1 Air audio output to the LINE IN of your HiFi installation or active speakers. The red RCA plug is the right channel output.
- If your HiFi installation is provided with an optical input you can use the supplied mini Toslink adapter, which is to be connected to the 3.5 mm output of the M1 Air module, with the 1 meter optical cable used to connect the M1 Air and the HiFi installation.

Note: Avoid placing the M1 Air receiver completely behind your HiFi equipment as this may screen off the WiFi signal, preventing proper operation.

Connecting the M1Air to the AUX 2 input of an Escape™ P9

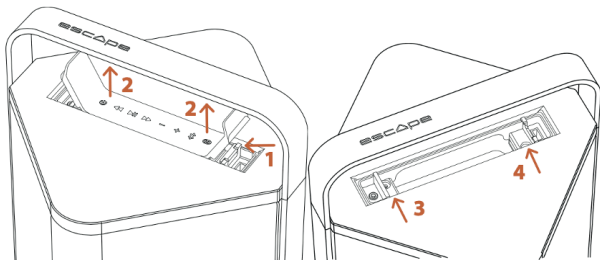

STEP 1/2

Unlock keypad

STEP 3/4

Lock keypad

1

STEP 1

- Open the keypad cover over the USB input to the right of the keypad and push the locking mechanism to remove the keypad from its compartment (see 1 and 2 on the drawing).

2

STEP 2

- Remove the keypad completely. Do not disconnect it from the cable connector.
- Stick one strip of the supplied Velcro tape to the far left of the bottom of the P9 compartment located below the keypad. Place the other Velcro strip centrally on the underside of the M1 Air.

- Connect the short (15 cm) 3.5mm – 3.5mm aux cable to the M1 Air Aux output and connect the short (4.5 cm) right angle USB type A to USB micro cable to the M1 Air power input.
- Use the Velcro strips to secure the M1 Air to the far right of the bottom, with the Escape™ logo reading in the same direction as on the hand grip. Now connect the 3.5 mm cable to the AUX 2 input of the P9. This is located to the left in the side wall of the compartment (don't confuse this with the AUX 1 input above). Next connect the short USB cable to the P9's USB power output. This is located to the right in the side wall of the compartment (don't confuse this with the USB Audio input at the top).

3

STEP 3

- To reinstall the keypad, you should slide it into the locking hook next to the AUX 1 input and gently press it into the snap-lock mechanism (3 and 4 on the drawing). You should now wait until the configuration of the M1 Air is complete.

4

STEP 4


- Turn on the P9 with the on/off button.
- **Important:** ensure that the latest version of the P9 firmware is installed on the device (minimum 3.1.8). For further details see the P9 product page in the Escape Remote app section.

Note: When using the M1 Air connected to the P9 AUX 2 input, the main volume and track controls (skip, pause, play) must be controlled via the M1 Air app, an element of the Escape Remote application or the music app (Spotify - Tydal - Apple Music etc) on your phone or tablet.

Connecting the M1 Air with your wireless network

SPOTIFY CONNECT, AIRPLAY 2 AND CHROMECAST SETTINGS VIA THE GOOGLE HOME APP


1 STEP 1



- Download the Google Home app [] to your phone or tablet to connect the M1 Air with your wireless network. Ensure that your phone or tablet is connected with the same WiFi network that you wish to use to set up the M1 Air.

2 STEP 2

- Wait until the M1 Air is in configuration mode. The green LED on the M1 Air will flash rapidly (0.2s on/off).

3 STEP 3

- Open the Google Home app [] and select the [+] symbol at top left on the start screen, or select "Set up Escape M1 Air". Follow the steps set out in the Google Home app.

Setup is complete. Open your favourite music app and select the AirPlay 2 symbol [] (iOS devices only) or the Cast symbol [] (iOS and Android devices) and stream the music to the M1 Air. Or stream directly via Spotify Connect.

Tip: Select the M1 Air in the Google Home app, go to device settings and activate "full dynamic range".

Tip: Group a combination of speakers via the Google Home app to play music synchronously throughout the home via Cast. **Note:** This function is not supported for Chromecast (1st generation) or devices with Chromecast built in.


CONFIGURATION IN AIRPLAY 2 AND SPOTIFY CONNECT ONLY, VIA AN IPHONE OR IPAD

STEP 1

- Ensure that your iPhone or iPad is connected with the same WiFi network that you wish to use to set up the M1 Air. Wait until the M1 Air is in configuration mode. The green LED on the M1 Air will flash rapidly (0.2s on/off).

STEP 2

- Open "settings" on your iPhone or iPad [🔧]. The M1 Air will create a temporary network and will appear in the list of available networks. **Important!** Do not select the temporary Escape M1 Air network (xxxxxxx) in the list of available networks.
- Instead select the "Escape M1 Air (xxxxxx)" under the message "Configure new AirPlay loudspeaker". Follow the steps set out under AirPlay configuration.

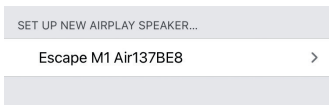

- Setup is complete. Open your favourite music app and select the AirPlay 2 symbol [🔊].

Note: If the "Configure new AirPlay loudspeaker" message is no longer visible then carry out a reset on the M1 Air and allow sufficient time for the device to start up again.

AirPlay 2 is supported on a MacBook or iMac via Apple Music and on a Windows PC via iTunes and Apple Music.

Tip: You can mix several different AirPlay 2 compatible loudspeakers or modules to allow music streaming in several rooms. AirPlay 2 is however not available on Android devices.

USING SPOTIFY CONNECT

Spotify® is a digital music service providing access to millions of songs. Spotify® Connect can be used to create a connection between the M1 Air and the internet, using the Spotify® app for iOS or Android, Mac or PC. You can make and receive telephone calls without interrupting the music. Once you have connected with the M1 Air you can switch off your mobile device or computer and the music will continue to play. Spotify® Connect can only play on a single speaker at any time.

ROON READY

Roon uses a cutting edge audio transport protocol which not only supports high resolution audio but also offers 2-way communication between Roon Ready endpoints and the Roon server. Being Roon Ready means that the Escape M1 Air uses the high end Roon RAAT streaming technology (Roon Advanced Audio Transport). This delivers an incredible user interface, easy installation, rock steady day-to-day reliability and the highest level of audio performance, without compromises. You can find more information on the www.roonlabs.com website.

Using the Escape Remote app: Download the Escape™ Remote app via the Google Play or Apple App store and follow the steps on the screen to get the most out of the M1 Air.



Important! The maximal output voltage on the M1 Air is set at 1 Volt as standard for use with the P9. Intentionally increasing the output voltage from 1 Volt to 2 Volts via the settings menu in the Escape app will inevitably lead to damage to the P9, which is not covered under the guarantee.

If you have connected the M1 Air to your HiFi installation and feel that it is not reaching maximum capacity, you should increase the preamp output voltage of the M1 Air from 1 Volt to 2 Volts via the settings menu. Set the volume of the power amplifier to a low setting before increasing the output voltage. Escape bv cannot be held liable for any damage to external equipment or loudspeakers.

Note: The M1 Air can only retain a single WiFi network at any one time. If you modify your WiFi network you must reset the M1 Air to the new network. You may first need to carry out a reset on the M1 Air.

Automatic software updates: The M1 Air's internal software will be updated automatically when a new version is available, provided the device is powered up and connected with a WiFi network. The mode LED flashes red-green-blue every 0.5 seconds during an update, and the device will restart automatically when the update is complete. Ensure that the M1 Air remains switched on during the update.

BLUETOOTH CONNECTION

Streaming music to the M1 Air via wireless Bluetooth® technology. Briefly press the Bluetooth® key to initiate the Bluetooth® connection. The status LED will flash blue. Go to Settings on your Apple® or Android™ device, select Bluetooth® in the connections list and switch on Bluetooth®.

Select Escape™ M1 Air xxxx in the list of devices. xxxx stands for the last 4 letter/digit combination in the device's unique serial number. You will find the full serial number on the packaging or on the label on the underside of the device. The blue LED will illuminate steadily once the connection is created.

Tip: It is possible to select the WiFi connection again on the M1 Air if it has already been set: briefly press the WiFi switch. (The status LED will go from blue to green)

Power-Led status indicator

MODE/STATUS	LED (RED, GREEN, BLUE)	MEANING
M1 Air is starting up	Flashing red 0.2s on, 0.2s off	M1 Air is in access point (AP) mode and is searching for available networks. (takes \pm 45 seconds)
Searching for available networks	Flashing green 0.5s on, 0.5s off	M1 Air is in access point (AP) mode and is searching for available networks. (takes \pm 20 seconds)
Set-up mode complete	Flashing green 0.2s on, 0.2s off	Wireless network(s) found. The user must connect the M1 Air with the selected wireless network via Google Home App (ChromeCast Audio and AirPlay 2 setup) or iOS® device (AirPlay 2 setup only).
Connected	Steady green light	Successful network connection using the known access data.
Network source	Steady green light	M1 Air in streaming mode.
Standby mode	Green LED dimmed	M1 Air is in Standby Mode, no music played in the last 20 minutes.
Factory reset	Green - Red 0.5s Green, 0.5s Red	A factory reset has been triggered - M1 Air is in startup mode.
Firmware is being updated	Repeated sequence: Red - Green - Blue. 0.5s-0.5s-0.5s	Firmware update in progress via one of the following: <ul style="list-style-type: none">• Programming of the M1 Air via the Escape Sync web page• Creating connection with the network and the OTA server• Downloading firmware via the OTA server.
Firmware update error	Red flashing 0.5s on, 0.5s off	Problem with file transfer (while downloading FW.bin file) <ul style="list-style-type: none">• Flash writing error (while writing in flash)• Network error (during connection with OTA server)• Firmware download failed
Bluetooth® linking mode	Blue flashing 0.2s on, 0.2s off	Bluetooth® not linked (detectable).
Bluetooth® source	Steady blue light	Switch to Bluetooth® source (if the network has not been specified, setup mode will also be initiated)

OPERATION	VIA	PRESS-IN TIME
(BT push button) Linking	Push button	Press briefly, blue LED flashes rapidly (0.2ms on, 0.2ms off)
(BT push button) Delete linked device	Push button	Hold down for 10s until blue LED flashes (1s on, 1s off)
(WiFi push button) Factory Reset	Push button	Keep WiFi push button depressed for longer than 10 seconds
Switch from WiFi to BT	Push button	Short press Bluetooth® button and Blue LED flashing to search for stored BT devices
Switch from BT to WiFi	Switch via IOS® or Android™ device	It is not possible to switch from BT to WiFi via the push button. This can only be done via a device on the same WiFi network and a music app supporting AirPlay2 and/or Chromecast.



84-O-104912-1